



“समृद्ध छथर निर्माणको आधार: शिक्षा, स्वास्थ्य, कृषि, पर्यटन र पुर्वाधार”

## छथर गाउँपालिका गाउँकार्यपालिकाको कार्यालय

शुक्रबारे, तेह्रथुम

कोशी प्रदेश नेपाल

प.सं.-२०८२/०८३(महिला बालबालिका तथा जेष्ठ नागरिक शाखा)

फोन नं ०२६-४२००९९

सं.:- ५१

मिति: २०८२/१२/२२

श्री सुचना !

सुचना !!

सुचना !!!

### बिषय: दरभाउ पेश गर्ने सम्बन्धमा ।

उपरोक्त सम्बन्धमा यस छथर गाउँपालिकालाई आवश्यक तपसिल बमोजिमका सहायक सामग्रीहरु चालु आ.व.०८२/०८३ का लागि सार्वजनिक खरिद ऐन, २०६३ तथा सार्वजनिक खरिद नियमावली, २०६४ बमोजिम खरिद गर्नुपर्ने भएकोले यस कार्यालयमा सुचिकृत ब्यवसाय पसल ले कुन दर भाउमा ढुवानी सहित उपलब्ध गराउन सकिन्छ। उक्त सामग्रीको दर भाउ कोटेसन आजको मितिले ७ दिन भित्र यस कार्यालयमा वा ईलेक्ट्रोनिकस माध्यम बाट उपलब्ध गराईदिन हुन अनुरोध छ ।

#### तपसिल

क्र.स.	विबरण	परिमाण	कैफियत
१.	Walking stick/canes	1 piece	
२.	Wheelchair	1 piece	
३.	Ankle foot (AFO)	1 piece	
४	Toilet chair	1 piece	
५	White cane	1 piece	
६	Hearing aids	1 piece	
७	Air Mattress	1 piece	
८	Tripod	1 piece	
९	Quadripod	1 piece	

नोट:- यसै पत्रसाथ सामग्रीहरुको स्पेसिफिकेसन संलग्न राखिएको छ ।

अग्नी प्रसाद पराजुली

प्रमुख प्रशासकीय अधिकृत  
अग्नी प्रसाद पराजुली

प्रमुख प्रशासकीय अधिकृत

“मैले तिरेको कर मेरै लागि, समृद्ध गाउँनिर्माणकालागि”

Email : chhathargaupalika@gmail.com, www.chhatharmun.gov.np

क.नं-५५

छथर गाउँपालिका

तेहथुम



मिति :- २०८२ माघ २५ गते

विषय : सहायक सामाग्रीको स्पेसिफिकेसन पठाइएको सम्बन्धमा ।

प्रस्तुत विषयमा तहाँ गाउँपालिकाबाट मिति २०८२/१०/२१ को प्राप्त पत्र अनुसार अपाङ्गता रोकथाम तथा पुनःस्थापना कार्यक्रम अन्तरगत अपाङ्गता भएका व्यक्तिहरूका लागि खरिद गर्नु पर्ने सहायक सामाग्रीहरूको स्पेसिफिकेसन पठाइदिन अनुरोध भएको हुँदा आवश्यक सामाग्रीहरूको स्पेसिफिकेसन यसै पत्र साथ संलग्न गरी पठाइएको व्यहोरा अनुरोध गर्दछु । यस सम्बन्धमा थप जानकारी लिनु पर्ने भएमा यस संस्थाका सिविएर अधिकृत श्री सजल मानन्धरसँग (९८६१६१३०३६) सम्पर्क गर्न सकिने व्यहोरा जानकारी गराउँदछु ।

धन्यवाद ।

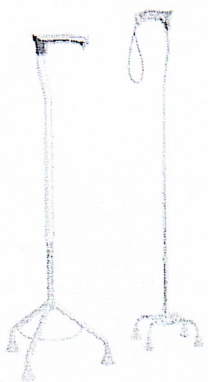
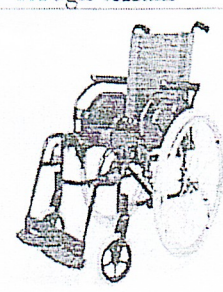
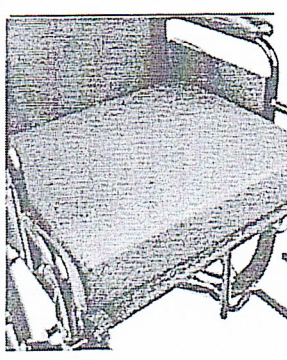
महिला कोलकोलिया मासा  
०२२/१०/२६

सजल मानन्धर

सिविएर अधिकृत

सो छथर गाउँपालिकाको कार्यालय, तेहथुम  
दर्ता नं: १२६८  
मिति: २०८२/१०/२६

सहायक सामग्री र मापदण्ड

	ASSISTIVE DEVICE	DEFINITION	SPECIFICATION
1.	<p>Walking sticks/canes ISO Code: 12.03.03</p> 	<p>Adjustable/non-adjustable mobility device with a handgrip Required Type and size:</p> <ul style="list-style-type: none"> <li>• Tripods: Medium: 2</li> <li>• Quadri pods: Medium: 1</li> </ul>	<ul style="list-style-type: none"> <li>• Constructed from aluminum alloy tubes. Diameter: mm</li> <li>• ABS handle with comfortable grip:</li> <li>• Height-adjustment mechanism: Telescopic, quick release</li> <li>• Soft gel on handle top</li> <li>• Tips securely fitted, non-slip, and replaceable interchangeable</li> <li>• Weight bearing capacity: 110kg</li> <li>• Size: Large, Medium, Small</li> </ul>
2.	<p>Manual Wheelchair with cushion ISO Code: 12.22.03</p> <p>Types:</p> <ul style="list-style-type: none"> <li>• Active</li> <li>• Semi-active</li> <li>• Rough terrain</li> </ul>  	<p>Intended to be self-propelled by the users by pushing rims or wheels. Can be used indoor/outdoor and on various types of terrain. Required size: Seat Width: 16 inches: 2 18 inches: 1</p>	<ul style="list-style-type: none"> <li>• <b>Active/Semi-active wheelchair</b> Wheelchair with folding or rigid frame, three or four wheels with large rear wheels, seat and backrest, armrests and footrests</li> <li>• <b>Frame:</b> frame with mechanism(s) to fold or dismantle</li> <li>• High quality steel or aluminum frame-125kg capacity</li> <li>• <b>Backrest</b> or back posts with adjustable height or supplied with range of back posts with fixed height.</li> <li>• Detachable, Swing Away Armrests.</li> <li>• Detachable, Swing In, Swing Out Leg rest</li> <li>• <b>Footrests:</b> with adjustable height to accommodate people with shorter and longer legs. Two flip-up swing-away or removable footrests on folding frame</li> <li>• <b>Rear wheels:</b> quick-release or removable without tool</li> <li>• <b>Puncture-proof</b>, pneumatic rear tyres and front castors</li> <li>• Anti-tippers for extra safety on slopes and uneven ground.</li> <li>• <b>Cushion:</b> Supplied with cover that meets general design requirements; for users with incontinence, a water resistant cover or lining to protect cushion should be supplied <ul style="list-style-type: none"> <li>➤ overall height approximately 70-120 mm</li> <li>➤ allows full or deep offloading or immersion (sink into) and envelopment (conforming to shape) 40-45 mm) or deeper</li> <li>➤ different length options or adjustable in length</li> </ul> </li> <li>• <b>Rough terrain wheelchair</b></li> </ul>



Sajal Manandhar  
Physiotherapist

Wheelchair with folding or rigid frame; three, four or more wheels, with two larger drive wheels; seat and backrest; and footrests behind front castors

- May be lever-propelled
- Longer wheelbase than active wheelchair; larger overall length than transport wheelchair with large rear wheel
- Low center of gravity to ensure stability
- Rear wheels and castors appropriate for outdoor rough terrain

Frame: frame with mechanism(s) to fold or dismantle, push handles can be integrated into frame, supplied as an add-on component or omitted, integrated stability options for feet backrest or back-posts with adjustable height or supplied with range of back-posts with fixed height

Backrest: tension-adjustable backrest or rigid backrest that can be adjusted independently from back-posts, quick-release mechanism to be removed to allow folding

Footrests with adjustable height. Two flip-up, swing-away or removable footrests on folding frames.

Rear wheels (manual propelling): with push-rims or lever-propelled and quick-release or removable without tools for rigid frames for transport; optional for wheelchairs with folding frame. Wider or larger-tread tyres

Puncture-proof or pneumatic, rear tyres and front castors

Rear and front wheels (lever propelling): size and width of front and rear wheels appropriate for rough terrain and wheelchair design, three or multiple wheels, puncture-proof or pneumatic wheels

**Cushion:**

Supplied with cover that meets general design requirements; for users with incontinence, a water-resistant cover or lining to protect cushion should be supplied

- overall height approximately 70–120 mm
- allows full or deep offloading or immersion (sink into) and envelopment (conforming to shape) 40–45 mm or deeper
- different length options or adjustable in length

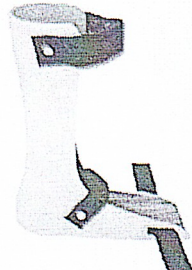
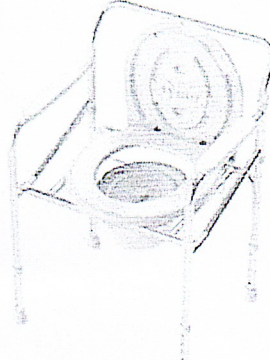
**Compliance**

- ISO standard/CE certified
- Designed for durability, urban maneuverability, and short uneven terrain use
- Load capacity: Min. 100 kg
- Suitable for users with advanced mobility skills or moderate needs
- Standard quality

**Accessories**

- Anti-tip bars, headrest, seatbelt
- Foldable for transport
- User manual and maintenance guide included

Kalyana Foundation  
2072  
\*  
Sajal Alankar  
Physiotherapist

3.	<p>Ankle-Foot Orthosis (AFO) / Orthosis for foot drop ISO Code: 06.12.06</p> 	<p>Orthosis that encompasses the ankle joint and the whole or part of the foot Required Size: Small: 1</p>	<p>Externally applied customized appliances/ device used to support, assist, or correct the weakened segment of the lower extremity in the subtalar region, ankle, and foot.</p> <p>Specifications:</p> <ol style="list-style-type: none"> <li>1. Made of durable and elastic polypropylene.</li> <li>2. Suitable for all types of shoes, can be used while wearing shoes</li> <li>3. Help with dorsal flexion</li> <li>4. Light weight, strong durability and load bearing</li> <li>5. Colors and details can be customized</li> </ol> <p>Size: Individual measurement should be taken at the reference center</p> <p>Note: Locally manufactured item available in Nepal.</p>
4.	<p>Toilet Chair/ Commode chairs ISO Code: 09.12.03</p> 	<p>Chairs, with or without castors, with a built-in collection receptacle used for toileting away from the bathroom Required Size: Medium 4</p>	<ol style="list-style-type: none"> <li>1. Frame &amp; Structure <ul style="list-style-type: none"> <li>• Material: <ul style="list-style-type: none"> <li>• Aluminum alloy for strength, corrosion resistance, and lightweight handling</li> </ul> </li> <li>• Frame Design: <ul style="list-style-type: none"> <li>• Foldable or fixed frame options for storage and portability</li> <li>• Anti-slip rubber ferrules on legs to prevent slipping on wet surfaces</li> </ul> </li> </ul> </li> <li>2. Seat &amp; Pan <ul style="list-style-type: none"> <li>• Seat Type: <ul style="list-style-type: none"> <li>➢ Ergonomically shaped plastic or padded seat with a central opening</li> <li>➢ Detachable seat cover for hygiene</li> </ul> </li> <li>• Commode Pan: Removable plastic or stainless-steel pan with handle and lid</li> <li>• Capacity: Minimum 5 liters</li> <li>• Easy to clean and sanitize</li> </ul> </li> <li>3. Comfort &amp; Safety Features <ul style="list-style-type: none"> <li>• Armrests: Fixed or flip-up design with soft padding for added comfort and side support</li> <li>• Backrest: Optional padded or molded back support for additional comfort</li> <li>• Height Adjustable Legs: Range: Typically, 40 cm to 55 cm to suit different user needs and match bed height</li> <li>• Wheels (Mobile Commode Chair): <ul style="list-style-type: none"> <li>• Four lockable caster wheels for mobility and safety</li> </ul> </li> <li>• Multi-function Design: Some models can be used as a shower chair, bedside commode, or over-toilet frame</li> <li>• Footrest: Included in some wheeled models for additional support</li> </ul> </li> <li>4. Weight &amp; Capacity <ul style="list-style-type: none"> <li>• Chair weight: 5 to 9 kg (depending on model and material)</li> <li>• User weight capacity: Up to 120–150 kg</li> <li>• Bariatric versions available for higher weight capacity (up to 200 kg)</li> </ul> </li> <li>5. Sizes <ul style="list-style-type: none"> <li>• Available in Small, Medium, Large</li> <li>• Pediatric models available with additional safety straps at smaller seat dimensions</li> </ul> </li> </ol>



*Handwritten signature and text:*  
 \*  
 Pradyumna Thapa  
 Physiotherapist



Output Limiting	Peak clipping or compression	Wide Dynamic Range Compression (WDRC)
Noise Reduction	Basic	Advanced (adaptive)
Feedback Cancellation	Basic	Adaptive/automatic
Microphone	Omni-directional	Omni or directional (adaptive optional)
Battery Type	Zinc-air or rechargeable	Same
Battery Size	13, 312, or 675	Same
Battery Life	Minimum 120 hours	Minimum 100 hours
Ear Mold Compatibility	Standard BTE ear hook	Same
Telecoil	Optional	Optional or integrated
Operating Conditions	0°C to 45°C, RH 0-90% non-condensing	Same

4. Performance & Standards

- Frequency Range: 250 Hz – 6,000 Hz
- Max Output (OSPL90): ≤ 135 dB SPL (BTE standard)
- HFA Gain: 30–60 dB (depending on model)
- Total Harmonic Distortion (THD): ≤ 3%
- Compliance: IEC 60118-0, 60118-7, WHO APL


5. Design Features

- Lightweight, tamper-resistant casing (IP52 or better)
- User-friendly controls
- LED indicator (for rechargeable models)
- Compatible with standard ear molds or custom shells

6. Accessories Included

- Carrying case
- Cleaning tool
- User manual (pictorial/manual)
- Spare tubes/domes (if applicable)
- Batteries (starter pack or rechargeable unit with charger)

**Air Mattress / Pressure relief mattress**  
ISO Code: 04 33 06



Effective alternating pressure system and is an ideal for prevention and bedsores treatment of patients at low risk of pressure ulcers.

Required Type:

APM: 1


1. Purpose: Provides redistribution of pressure to prevent skin breakdown and promote healing of pressure ulcers in patients who are bedridden, post-surgical, or have limited mobility.

2. Types

- Foam Mattress: High-density or multi-layered foam with contoured zones
- Alternating Pressure Mattress (APM): Uses air cells that inflate and deflate cyclically via pump
- Gel or Hybrid Mattresses: Combine foam and gel layers or air-cell systems for advanced support

3. Construction & Material

- Top Cover: Waterproof, breathable, and antimicrobial fabric (e.g., PVC-free polyurethane), Removable and washable
- Core Material: Foam: High-resilience (HR) or viscoelastic (memory) foam


  
 Dr. Manan Kumar
   
 Physiotherapist

			<ul style="list-style-type: none"> <li>• Air: air cells with medical-grade pump, Optional gel-infuse zones or corrugated surfaces for enhanced pressure distribution</li> <li>• Base: Non-slip bottom surface for stability on the bed frame</li> </ul> <p>4. Pressure Redistribution Features</p> <ul style="list-style-type: none"> <li>• Zoned pressure mapping to reduce peak pressure on sacrum, heels, and shoulders</li> </ul> <p>5. Dimensions</p> <ul style="list-style-type: none"> <li>• Standard Adult Size:</li> <li>• Length: 190–200 cm</li> <li>• Width: 85–90 cm</li> <li>• Thickness: 10–15 cm (foam); up to 20 cm (air or hybrid)</li> <li>• Pediatric and Bariatric Sizes as per the height and weight to be provided.</li> </ul> <p>6. Weight Capacity</p> <ul style="list-style-type: none"> <li>• Standard mattress: Up to 120–150 kg</li> <li>• Bariatric models: Up to 250–300 kg</li> </ul> <p>7. Pump Unit (for APMs)</p> <ul style="list-style-type: none"> <li>• Low-noise, vibration-free operation</li> <li>• Adjustable pressure settings</li> <li>• Visual and audible alarms for low pressure or power failure</li> <li>• Power input: 220–240V, 50/60 Hz</li> </ul> <p>8. Safety &amp; Maintenance</p> <ul style="list-style-type: none"> <li>• Fire-retardant materials</li> <li>• Infection controls compliant</li> </ul> <p>Easy to clean and disinfect</p>
--	--	--	---



*Sajal Manandhar*  
*Physiotherapist*